


# Stainless Steel Hex Lag Screws

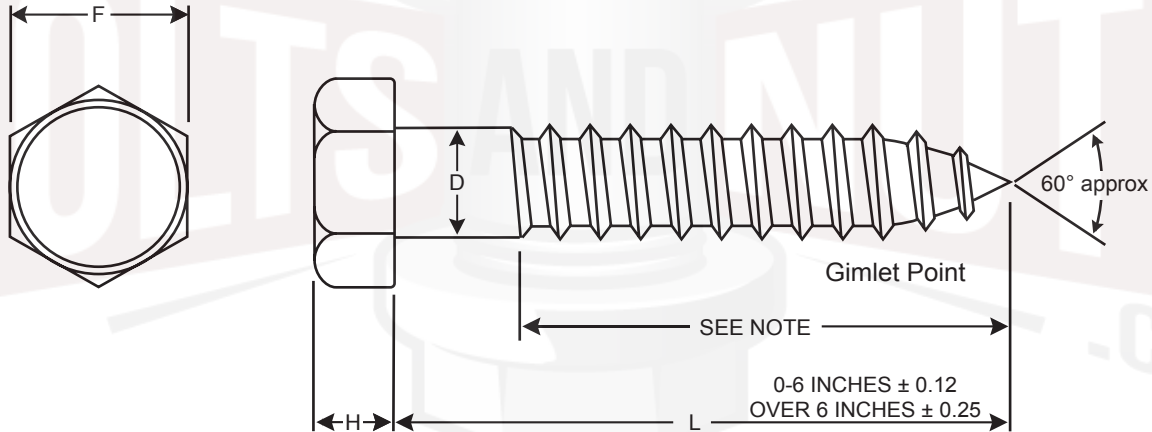

**NOTE:**

Minimum thread length is 1/2 length of the screw plus 0.50" or 6" whichever is shorter.  
Screws too short for the formula shall be threaded as close to the head as practicable.

Diameter and Pitch	D		C		D	
	Body Diameter (Inches)		Width Across Flats (Inches)		Head Height	
	Max	Min	Max	Min	Max	Min
1/4"-10	0.26	0.237	0.438	0.425	0.188	0.15
5/16"-9	0.324	0.298	0.5	0.484	0.235	0.195
3/8"-7	0.388	0.36	0.562	0.544	0.268	0.226
1/2"-6	0.515	0.482	0.75	0.725	0.364	0.302

**Dimensions: ASTM B18.2.1**  
**Material: 18-8 (T304) Stainless Steel**  
**Threading: Lag Threads**

440.606.6557

www.boltsandnuts.com

info@boltsandnuts.com