




## Class 8.8 Hex Head Cap Screws

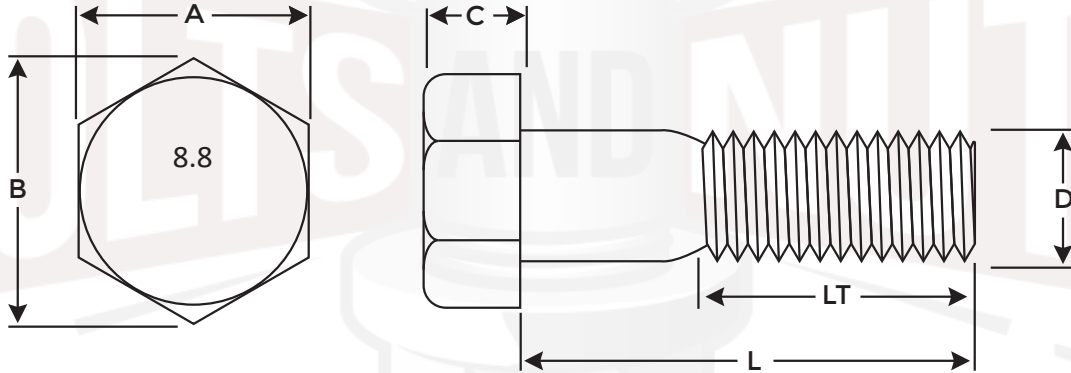

Nominal Size or Basic Bolt Diameter	A		C		D		LT
	Width Across Flats (mm)		Height of Head (mm)		Full Size Body Diameter (mm)		Product will be Partial Thread if the Length ("L") is
	Max	Min	Max	Min	Max	Min	
<b>M5</b>	8	7.78	3.65	3.35	5	4.83	25mm and Longer
<b>M6</b>	10	9.78	4.15	3.85	6	5.82	25mm and Longer
<b>M8</b>	13	12.73	5.45	5.15	8	7.78	30mm and Longer
<b>M10</b>	17	16.73	6.58	6.22	10	9.78	45mm and Longer
<b>M12</b>	19	18.67	7.68	7.32	12	11.73	50mm and Longer
<b>M14</b>	22	21.70	8.98	8.62	14	13.70	50mm and Longer
<b>M16</b>	24	23.67	10.18	9.82	16	15.73	55mm and Longer

Dimensions: Full Thread DIN 933 | Partial Thread DIN 931

Material: ISO 898-1 Class 8.8

Tensile Strength: 800 MPa Minimum

Headmark: "8.8" and MFG ID

440.606.6557

[www.boltsandnuts.com](http://www.boltsandnuts.com)

[info@boltsandnuts.com](mailto:info@boltsandnuts.com)

ONLINE FASTENER GROUP LLC CLAIMS ALL PROPRIETARY RIGHTS TO THIS DRAWING AND THE INFORMATION IT CONTAINS. THIS MATERIAL IS CONFIDENTIAL. DISCLOSURE, REPRODUCTION, AND MANUFACTURING IS STRICTLY PROHIBITED WITHOUT THE EXPRESS WRITTEN PERMISSION OF ONLINE FASTENER GROUP LLC . ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.