



## **Phillips Flat Head Machine Screws**



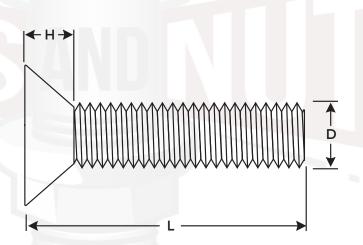

| Nominal<br>Size or<br>Basic Bolt<br>Diameter | Α                        |       | Н                         | М                          |                 |
|--|--------------------------|-------|---------------------------|----------------------------|-----------------|
|  | Head<br>Diameter<br>(MM) |       | Height<br>of Head<br>(MM) | Recess<br>Diameter<br>(MM) | Drive<br>Number |
|  | Max                      | Min   | Max                       | Ref.                       |                 |
| M2   | 3.8                      | 3.5   | 1.20                      | 2.35                       | 1               |
| M2.5   | 4.70                     | 4.4   | 1.50                      | 2.70                       | 1               |
| М3   | 5.60                     | 5.3   | 1.65                      | 2.90                       | 1               |
| M4   | 7.50                     | 7.14  | 2.20                      | 4.40                       | 2               |
| M5   | 9.20                     | 8.84  | 2.50                      | 4.60                       | 2               |
| М6   | 11.00                    | 10.57 | 3.00                      | 6.60                       | 3               |
| М8   | 14.50                    | 14.07 | 4.00                      | 8.70                       | 3               |

Dimensions: DIN 965; Fully Threaded (unless otherwise Noted)

Material: ISO 898-1; Class 4.8

Threading: 6g

440.606.6557

www.boltsandnuts.com

info@boltsandnuts.com

ONLINE FASTENER GROUP LLC CLAIMS ALL PROPRIETARY RIGHTS TO THIS DRAWING AND THE INFORMATION IT CONTAINS. THIS MATERIAL IS CONFIDENTIAL. DISCLOSURE, REPRODUCTION, AND MANUFACTURING IS STRICTLY PROHIBITED WITHOUT THE EXPRESS WRITTEN PERMISSION OF ONLINE FASTENER GROUP LLC . ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.