




Grade 5 Round Head Square Neck Carriage Bolts

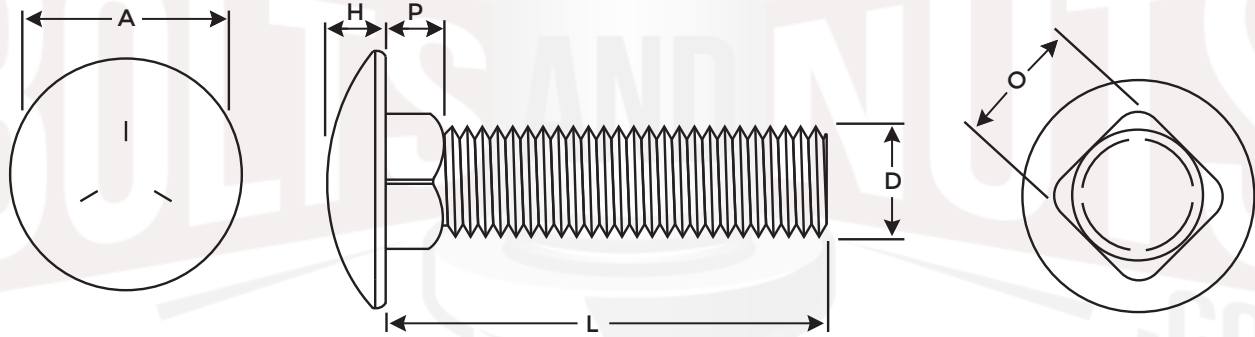

Nominal Size or Basic Bolt Diameter	A		H		O		P		Q	R
	Head Diameter (Inches)		Head Height (Inches)		Square Width (Inches)		Square Depth (Inches)		Corner Radius in Square	Fillet Radius
	Max	Min	Max	Min	Max	Min	Max	Min	Max	Max
1/4"	0.594	0.563	0.145	0.125	0.260	0.245	0.156	0.125	0.031	0.031
5/16"	0.719	0.688	0.176	0.156	0.324	0.307	0.187	0.156	0.047	0.031
3/8"	0.844	0.782	0.208	0.188	0.388	0.368	0.219	0.188	0.047	0.031
1/2"	1.094	1.032	0.270	0.250	0.515	0.492	0.281	0.250	0.047	0.031
5/8"	1.344	1.219	0.344	0.313	0.642	0.616	0.344	0.313	0.078	0.062
3/4"	1.594	1.469	0.406	0.375	0.768	0.741	0.406	0.375	0.078	0.062

Dimensions: ASME B18.5
 Material: SAE J429 Grade 5
 Tensile Strength: 120,000PSI Minimum
 Threading: ASME B1.1, UNC & UNF, Class 2A
 Headmark: 3 Radial Lines 120 Degrees Appart & MFG ID

440.606.6557

www.boltsandnuts.com

info@boltsandnuts.com

ONLINE FASTENER GROUP LLC CLAIMS ALL PROPRIETARY RIGHTS TO THIS DRAWING AND THE INFORMATION IT CONTAINS. THIS MATERIAL IS CONFIDENTIAL. DISCLOSURE, REPRODUCTION, AND MANUFACTURING IS STRICTLY PROHIBITED WITHOUT THE EXPRESS WRITTEN PERMISSION OF ONLINE FASTENER GROUP LLC . ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.